interweb

Generated on 13/11/2026 17:50

KNOWLEDGE BASE · PUBLIC DOCUMENT

Using SMTP Relay and the e-mail API together: the same domains, log and blocked list

Comparisons and alternatives


CODE	VERSION	COUNTRY · LANGUAGE
RLX-AO-KB-2532	v2026.11.13	Angola · English

Interweb Angola
RLX Angola, Lda. · Group RLX Holdings
Tax ID (NIF) 500 260 5724 · Commercial registration no. 26464-25/250724

https://www.meu.interweb.ao/knowledgebase/2532

Using SMTP Relay and the e-mail API together: the same domains, log and blocked list

Comparisons and alternatives Created on **November 13, 2026** 2 min read

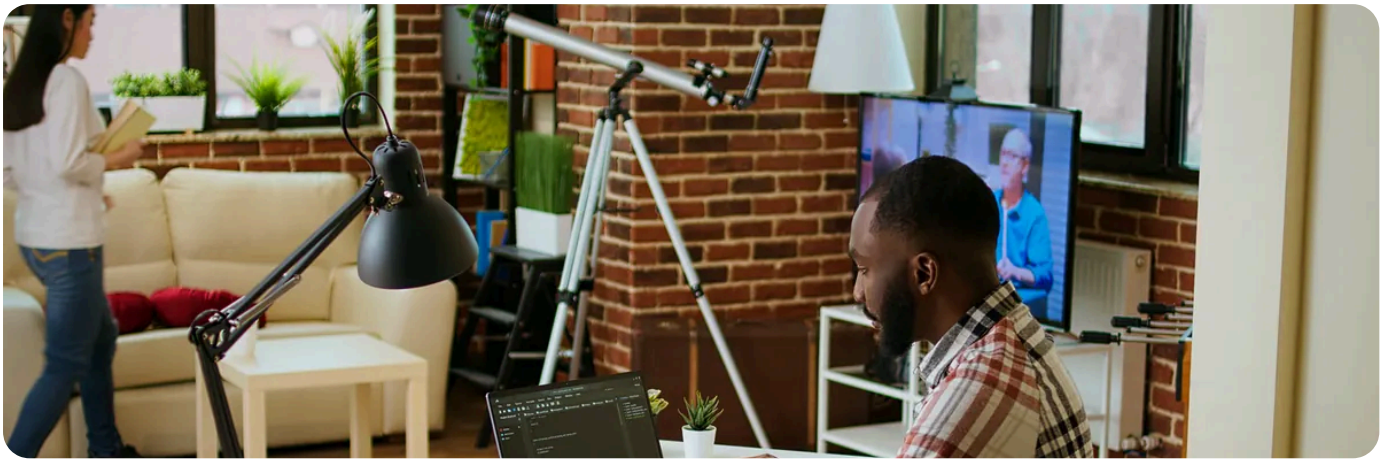

The short answer: SMTP Relay and the e-mail API **send through the same servers**, with the **same verified domains**, the **same log** and the **same blocked list**. Only the way the program connects changes. So you can use both at once: WordPress and the printer over SMTP, the new application through the API. The general comparison of the two routes is in **sending by SMTP or through an e-mail API**.

What is the same and what changes

	SMTP Relay	E-mail API
Who it is for	Programs that already send over SMTP.	New systems, or ones that want more control.
How it connects	Server, port, username and password.	API key in the header, over HTTPS.
Templates with variables	The program builds the message.	Yes, stored in the Email Center.
Verified domains	The same.	The same.
Log and blocked list	The same.	The same.

One account, two routes: examples

Situation	How to split it
A WordPress site and your own application	WordPress through its SMTP plugin; the application through the API, with templates.
An old ERP and a new customer portal	The ERP over SMTP, because it speaks nothing else; the portal through the API.

Situation	How to split it
Printers and system alerts	All over SMTP, each device with its own credential.

Because everything lands in the same log, you see the e-mails from both routes in one place, and an address that was blocked through one route does not receive through the other either.

When to move a program from SMTP to the API

You need	Through the API
Templates stored in the Email Center, with variables	Change the wording without touching the program.
To know right away what happened to each e-mail	Webhook notices say when it was delivered, bounced or marked as spam.
To schedule a send for later	One field in the request.
To repeat a request without sending twice	The Idempotency-Key header.

SMTP credentials and API keys are different things.
Revoking an SMTP credential does not touch your API keys, and the other way round. Each is managed in its own place.

The API documentation and examples are on the **API page**.

RECOMMENDED

Want to use both routes? Tell us how many e-mails you send each month, over SMTP and through the API, and we will prepare the proposal.

Ask for a proposal →

SEE ALSO

- **Sending e-mail by SMTP or through an e-mail API: which suits your application** →
- **SMTP Relay: an SMTP server for the automatic e-mails of your site, system or device** →

The program says sent, the customer got nothing: finding SMTP e-mails in the Email Center log →

SMTP Relay in Laravel and other PHP frameworks: the .env settings and a first test e-mail →

Your application sends from a mailbox: when to switch it to SMTP Relay →

interweb

Interweb Angola

RLX Angola, Lda. · Group RLX Holdings

TAX ID (NIF)	500 260 5724
COMMERCIAL REGISTRATION NO.	26464-25/250724
REGISTERED OFFICE	Rua Direita do Patriota, Bairro Dangereux Belas, Luanda, Angola
CONTACT	info@interweb.ao · +244 942 011 191 · www.interweb.ao
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed

Online version of this document

RLX-AO-KB-2532 · v2026.11.13 · Generated on 13/11/2026 17:50