interweb

Generated on 13/11/2026 18:16

KNOWLEDGE BASE · PUBLIC DOCUMENT

The OpenAPI specification of our API: what it is, where to download it and what it contains

WhatsApp & APIs


CODE	VERSION	COUNTRY · LANGUAGE
RLX-AO-KB-2732	v2026.11.13	Angola · English

Interweb Angola
RLX Angola, Lda. · Group RLX Holdings
Tax ID (NIF) 500 260 5724 · Commercial registration no. 26464-25/250724

https://www.meu.interweb.ao/knowledgebase/2732

The OpenAPI specification of our API: what it is, where to download it and what it contains

WhatsApp & APIs Created on **November 13, 2026** 2 min read

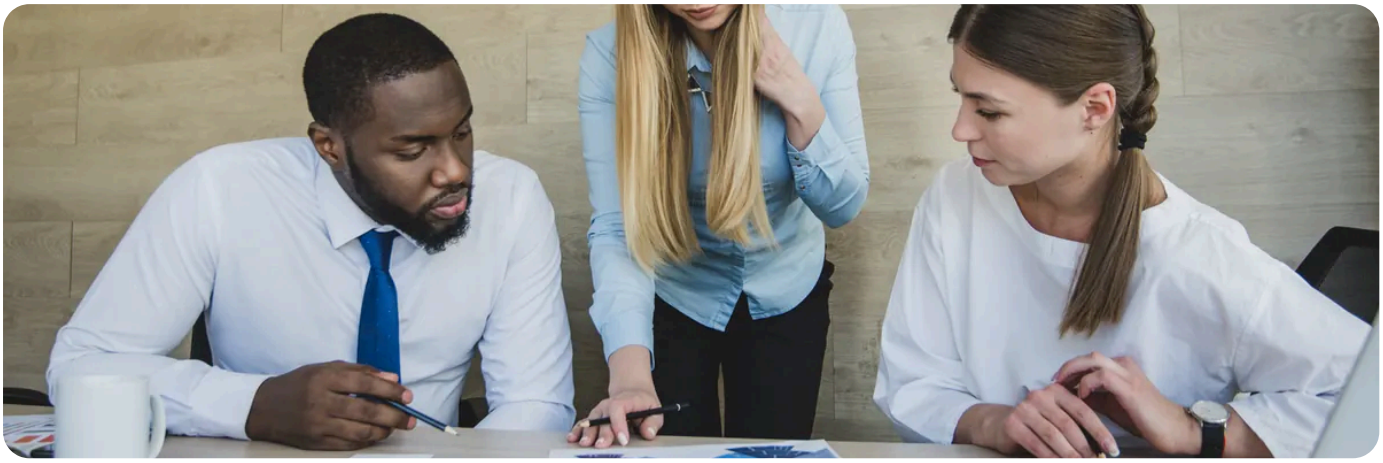

The short answer: the OpenAPI specification is a JSON file, `openapi.json`, that describes **the whole API** in a format tools understand: the address, every operation, the parameters, request bodies, responses, errors and how to authenticate. The reference in the documentation is built from this same file. It uses the **OpenAPI 3.1** format.

Where to find it

Where	How to get there
In the API reference	At the end of the page, in the Specification section: **Download the OpenAPI specification**. It already carries the Interweb API address.
In llms.txt	In the last section, Specification.
From the API itself	The `GET /v1/openapi.json` operation returns the specification, with no key.

To import into a tool, use the file from the reference, which is the one that goes with the documentation you are reading.

What is inside

Part	What it is
`info`	The name, version and description: how to authenticate and what sets the Sandbox and Production modes apart.
`servers`	The API base address.
`paths`	Every operation, with its summary, parameters, body, responses and examples.

Part	What it is
`components`	The shared pieces: data schemas, error responses, headers and the `bearerAuth` scheme, the key in the `Authorization` header.
`tags`	The areas: `domains`, `dns`, `sms`, `billing` and the rest. Tools use them to create folders.
`x-` **fields**	Our own extensions: `x-permission` gives the permission for each operation, `x-summary-pt` and `x-description-pt` hold the Portuguese texts, and `x-limits` sums up the limits.

What it is for

1. **Importing into an API client**, such as Postman or Insomnia, to have every request ready: see **Postman** and **Insomnia and other clients**.
2. **Generating a client** in your language: see **generating an API client**.
3. **Checking in your tests** that your program requests and responses match what the API expects.
4. **Giving an AI assistant** the exact description of the operations.
5. **Seeing what changed:** keep a copy and compare it with the next one.

The standard texts in the specification are in English.
The Portuguese ones are in the `x-summary-pt` and `x-description-pt` fields, which most tools ignore.

Paths start with `/v1` and the server address does not include it.
If you set up a tool by hand, do not add `/v1` twice.

RECOMMENDED

Download the specification and import it into your favourite tool.

Download the specification →

SEE ALSO

- Importing our API into Postman from the OpenAPI specification, step by step
- Importing our API into Insomnia and other API clients, and setting the Bearer key
- Generating an API client for your language from our OpenAPI specification
- Our API docs and AI tools: the llms.txt file and giving an assistant the whole documentation
- How our API documentation is organised: Get started, Areas, API reference and Playground

interweb

Interweb Angola

RLX Angola, Lda. · Group RLX Holdings

TAX ID (NIF)	500 260 5724
COMMERCIAL REGISTRATION NO.	26464-25/250724
REGISTERED OFFICE	Rua Direita do Patriota, Bairro Dangereux Belas, Luanda, Angola
CONTACT	info@interweb.ao · +244 942 011 191 · www.interweb.ao
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed

Online version of this document

RLX-AO-KB-2732 · v2026.11.13 · Generated on 13/11/2026 18:16