interweb

Generated on 28/11/2026 14:47

KNOWLEDGE BASE · PUBLIC DOCUMENT

Errors when setting up a tool with All in One AI: 401, model not found, no credits, /v1 and rejected config files

All in One AI


CODE	VERSION	COUNTRY · LANGUAGE
RLX-AO-KB-2952	v2026.11.28	Angola · English

Interweb Angola
RLX Angola, Lda. · Group RLX Holdings
Tax ID (NIF) 500 260 5724 · Commercial registration no. 26464-25/250724

https://www.meu.interweb.ao/knowledgebase/2952

Errors when setting up a tool with All in One AI: 401, model not found, no credits, /v1 and rejected config files

All in One AI Created on **November 28, 2026** 4 min read

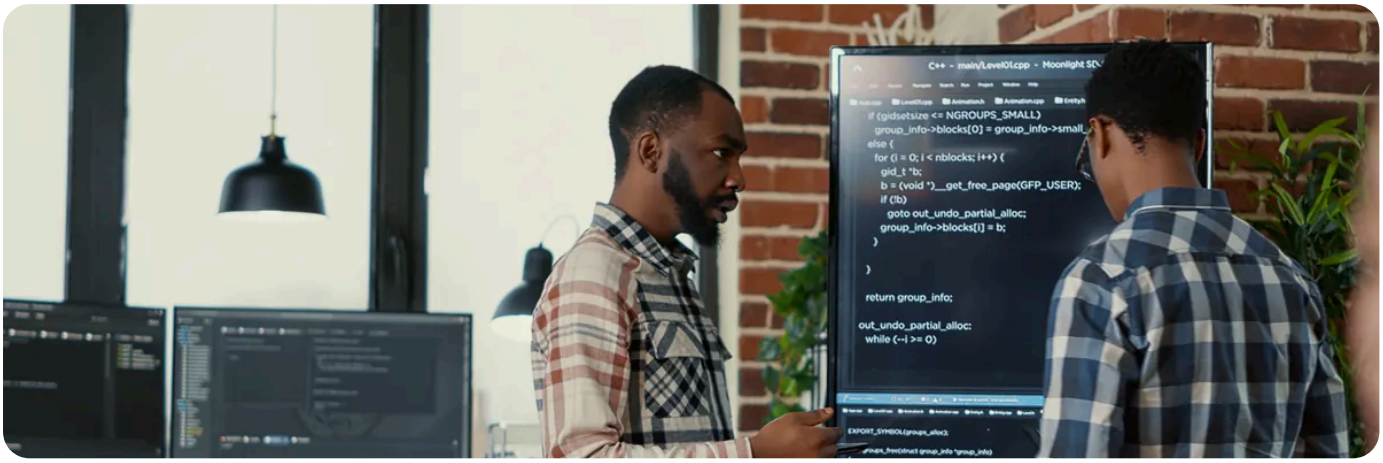

Almost every error when setting up a tool with All in One AI comes from four things: the key, the address, the model id and the configuration file. Here are the API answers and the file errors, with what to do in each case.

API answers

Answer	Why	What to do
`401 unauthorized`	The key is missing or wrong, or the tool did not read the variable.	Check the key. After `setx`, close and open the terminal and the tool.
`403 insufficient_scope`	The key does not have `ai:write`.	Create a key with `ai:read` and `ai:write`.
`403 account_...`	The All in One AI account is not active.	Open All in One AI and check the account status.
`402 insufficient_credits`	There are not enough credits to cover the reservation for the answer.	Buy credits or lower the maximum output (16,000 in our examples).
`404 model_not_found`	The model id is wrong or incomplete.	Use the id with the slash, as it comes in `GET /v1/models`.
`404 not_found`	The base address is wrong: an extra `/v1` in Claude Code, or a missing one in the others.	Claude Code: `https://api.interweb.ao`. The others: `https://api.interweb.ao/v1`.

Answer	Why	What to do
`429 plan_limit_reached`	The plan points have run out and the request cannot be paid with credits.	Wait for the reset or turn on Use credits when the plan runs out.
`429 rate_limited`	You went over the key's limit of requests per minute.	Wait the number of seconds in `Retry-After`. The tools usually retry on their own.
`502 upstream_error`	The AI service did not respond as expected.	Try again shortly or choose another model.

In Claude Code, errors arrive in the Anthropic format. In Codex, in the OpenAI format, with the same code. The limits are in **API request limits**.

The configuration file was rejected

What happens	What to do
OpenCode says `Unrecognized key: "providers"`.	Your version does not know the new format. Use the format with `"provider"` from **the OpenCode article**.
The tool does not start, or ignores the file after a change.	The JSON has a missing or extra comma. Items are separated by commas and the last one has none.
Nothing changes, as if the file did not exist.	On Windows, the file may have ended up with a hidden `.txt` at the end. Check with `dir` and fix the name.
Codex rejects the provider.	`wire_api` must be `"responses"`. The provider id cannot be `openai`, `ollama` or `lmstudio`. And the provider must be in `~/.codex/config.toml`, not in the project file.
Hermes Agent fails to read `config.yaml`.	In YAML, the spaces at the start of the line matter. The fields of `model:` take two spaces.
Kilo Code's `{env:...}` does not work.	It only works in the global file, in `~/.config/kilo/`. A project file does not read variables.

Other signs

What you see	Why
A model does not show in the tool's list.	In OpenCode, Kilo Code (command line) and OpenClaw, only the models written in the file show. Add the catalogue id.

What you see	Why
The answer is always "Resposta de teste (sandbox).".	You are using a `sandbox_` key. Everything is right: switch to the `prod_` key to work.
The agent answers but does not edit files.	The model does not support tools (function calling). Use `moonshotai/kimi-k2.7-code`, `zai-org/glm-5.2` or `deepseek-ai/deepseek-v4-pro`.
The variable exists, but the tool does not see it.	`setx` only applies to new windows. Close the tool and the terminal completely, then open them again.

Never send the key by chat, e-mail or support ticket.
If that happened, revoke it and create another: see **what to do, in the right order**.

Every error answer has a `correlation_id`. If you need help, **open a support ticket** with that code, the tool and the model, without the key.

RECOMMENDED

Want to code with AI using our models? Visit the Coding with AI page.

See Coding with AI →

SEE ALSO

- **Which coding tool to use with All in One AI: OpenCode, Claude Code, Codex, Cursor, Cline, Kilo Code or Aider**
- **OpenCode with All in One AI: creating opencode.json from scratch, the key and the models**
- **Using Claude Code with All in One AI: the variables, the model and common errors**
- **API request limits: per key, per account and per task, the headers and what to do after a 429**
- **Coding with AI in All in One AI**

interweb

Interweb Angola

RLX Angola, Lda. · Group RLX Holdings

TAX ID (NIF)	500 260 5724
COMMERCIAL REGISTRATION NO.	26464-25/250724
REGISTERED OFFICE	Rua Direita do Patriota, Bairro Dangereux Belas, Luanda, Angola
CONTACT	info@interweb.ao · +244 942 011 191 · www.interweb.ao
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed

Online version of this document

RLX-AO-KB-2952 · v2026.11.28 · Generated on 28/11/2026 14:47